

ESSENTIAL FOR YOUR COOLING TOWER



"Goodway offers great pieces of equipment that help us get the job done right."

— John H

CTV-F2 – Ideal TowerVac® Companion


Filter cooling tower wastewater and get clean water for your tower basin with this high-flow capability and small-micron filtration unit. You can also use this powerful unit in conjunction with the CTV-1501 TowerVac® to restore optimal operating conditions to cooling towers.

Easy to clean and reuse twin filter cartridges clean tower water down to 5 microns for better performance. A clean water discharge rate of up to 50 GPM means it can handle any heavy-duty tower-cleaning job you encounter.

CTV-F2	
Input Water Pressure	Maximum 30 PSI at 50 GPM
Filters	Two reusable synthetic, 40 square foot, 5 micron media
Dimensions	38" high x 20" wide x 20" deep
Weight	70 lbs net dry

FEATURES

- Reusable filters
- Quick lock lids
- Quick connect hoses and tools

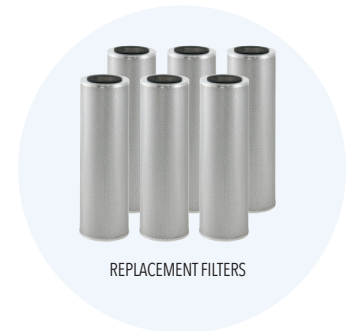

REPLACEMENT FILTERS:
9703-6: Replacement filters (package of six)
 **Call for Price**

CTV-F2: TowerVac Filtration System, including two 5 micron media filters, 25' connection hose, 25' outlet hose, and mobile dolly..... **Call for Price**

CONTROLLING HARMFUL LEGIONNAIRES' DISEASE BACTERIA

9 TIPS YOU CAN USE TODAY!

1. INSPECT TOWERS MONTHLY
2. CLEAN TOWER BASIN SURFACES REGULARLY
3. IMPLEMENT A WATER TREATMENT PROGRAM
4. DON'T FORGET TO CLEAN THE FILL
5. MAINTAIN SUMP WATER AT LOW TEMPERATURES
6. SIDE-ARM AND DEAD-LEG PIPING
7. USE PERSONAL PROTECTIVE EQUIPMENT WHEN CLEANING
8. LOWER THE TOWER DRIFT RATE
9. KEEP GOOD RECORDS



Call: 1-800-333-7467
Visit: www.goodway.com
 Goodway Technologies Corporation
 420 West Avenue, Stamford, CT 06902-6384 U.S.A.
 Phone: 203-359-4708 • Fax: 203-359-9601 • goodway@goodway.com