



CC-400HF Quick Start Guide





PLEASE REVIEW
IMPORTANT SAFETY
INSTRUCTIONS
LOCATED IN
OPERATORS MANUAL

Proper Startup Essentials



1 Replace the red cap with the black cap


2 Attach the high-pressure hose to the quick connect on the output of the pump.

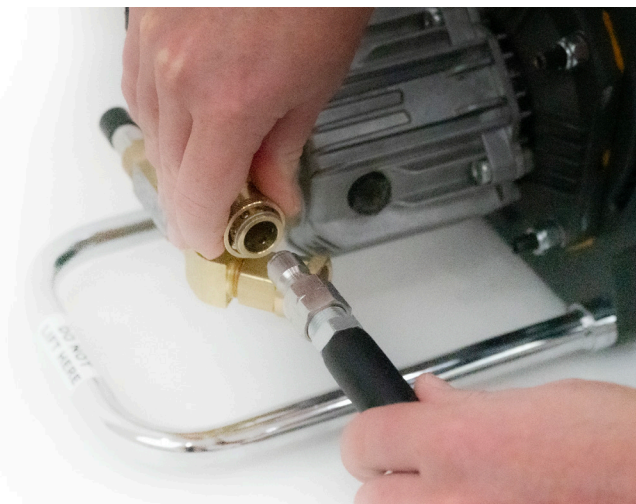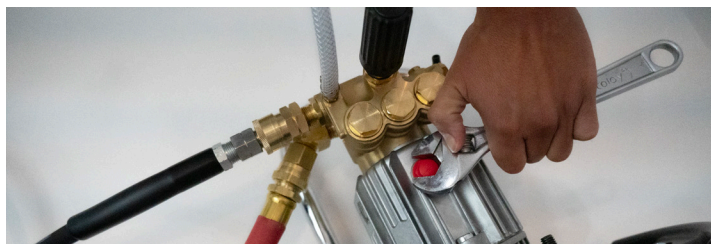

3 Attach the spray gun to the quick connect of the high-pressure hose.



4 Attach the water supply hose to the water inlet on the output of the pump and turn the water on.

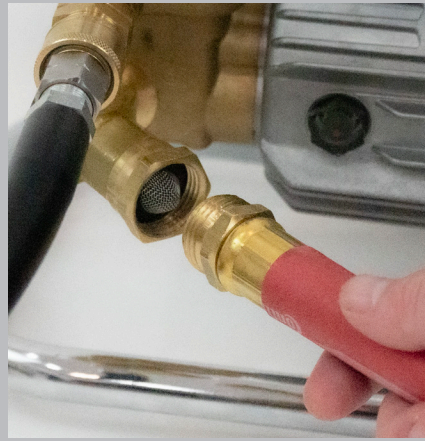

5 Plug the 3-prong GCFI plug in to an outlet and press reset to ensure its functioning.



6 Pull the trigger of the gun to allow the water to flow.



7 While holding the trigger, turn on the machine and allow it to run water for 20-30 seconds. *(Note: do not attach any of the additional nozzles to the gun during this step.)*




8 Let go of the trigger and put the soap dip tube into your container of COILSHINE Chemical.



9 Attach either the black nozzle or wonder-wand to the spray gun's quick connect to siphon and apply soap.



10 Attach the yellow nozzle to the spray gun's quick connect to rinse.
(Note: You can use the wonder-wand to rinse but you must remove the dip tube from the COILSHINE chemical).

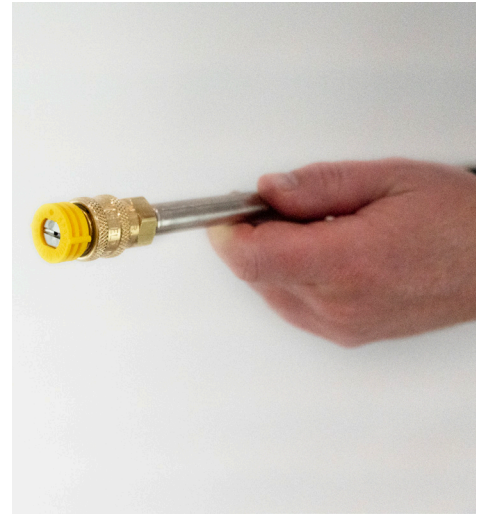

GOODWAY®

HVAC & FACILITY MAINTENANCE SOLUTIONS

GOODWAY® TECHNOLOGIES CORPORATION
420 West Avenue, Stamford, CT 06902 USA
Tel: 203-359-4708 · Toll-Free Tel: 800-243-7932
Fax: 203-359-9601 · Toll-Free Fax: 800-359-9625
Email: goodway@goodway.com
Visit: www.goodway.com