THE GOLD STANDARD IN TUBE CLEANING

RAM-4 – Rotary Tube Cleaner

Goodway Technologies pioneered the modern tube cleaner, helping save time and money, and drive efficiency in heat exchangers worldwide. The all-new RAM-4-ID is the fifth generation of this market-leading tube cleaner. It boasts a sleek modern design, improved portability, and intuitive controls that make the RAM-4 tube cleaners the choice around the world to make tough chiller tube cleaning and heat exchanger tube cleaning a simple, one-person operation.

RAM-4 delivers powerful performance for fast, effective cleaning of tubes/pipes 1/4"-1" (6.4-25.4mm) I.D. in chillers, condensers, evaporators, absorption machines, and heat exchangers.

The RAM-4 uses a cleaning tool mounted to the tip of a flexible shaft, which rotates at a constant speed to clean tubes of silt, mud, scale, and more. Integrated flush quickly removes deposits, keeping tubes clean and operating optimally.

RAM-4-ID also features a reversible shaft rotation to increase cleaning performance and includes a two-direction foot switch, which enables faster, more controlled cleaning.

RAM-4-ID-60-R: Tube cleaner, including mobile dolly, tool storage box and two-direction foot switch (115V, 50/60 Hz).....**Call for Price**

FEATURES

- Simple to operate - minimal training required
- Stainless steel construction - long life
- Interchangeable cleaning tools - versatile
- Large wheels - easy to move
- Simultaneous water flush - removes deposits
- Foot switch activation - safe operation
- Flexible Shaft Speed: 862.5 rpm
- Motor Power: 1/2 HP (0.4 kW)
- Input Power: Standard: 9 amps, 115 V, 60 Hz AC (Optional: 9 amps, 115 V, 50 Hz; 4.5 amps, 230 V, 60 Hz; or 4.5 amps, 230 V, 50 Hz)
- Dimensions: 37" (940mm) high x 20" (510mm) wide x 17" (430mm) deep
- Weight: 49 lbs (22 kg) net dry



EXCLUSIVE THREADLESS QUICK CONNECT SHAFT COUPLING

RAM-4	
Motor Power	0.5 HP (0.4 kW)
Input Power	Standard: 9 amps, 115 V, 60 Hz AC (Optional: 9 amps, 115 V, 50 Hz; 4.5 amps, 230 V, 60 Hz; or 4.5 amps, 230 V, 50 Hz)
Power Supply Cord	21', 14-3 GFCI
Flexible Shaft Speed	862.5 rpm
Water Requirements	Minimum 30 PSI at 2 GPM
Dimensions	37" (940mm) high x 20" (510mm) wide x 17" (430mm) deep
Weight	49 lbs (22 kg) net dry

GOODWAY®
INNOVATIVE MAINTENANCE SOLUTIONS

Call: 1-800-333-7467
Visit: www.goodway.com
Goodway Technologies Corporation
420 West Avenue, Stamford, CT 06902-6384 U.S.A.
Phone: 203-359-4708 • Fax: 203-359-9601 • goodway@goodway.com

REPAIR KIT

CHILLER BIB BAG
WITH FRAME

PATENT NO. 6863116

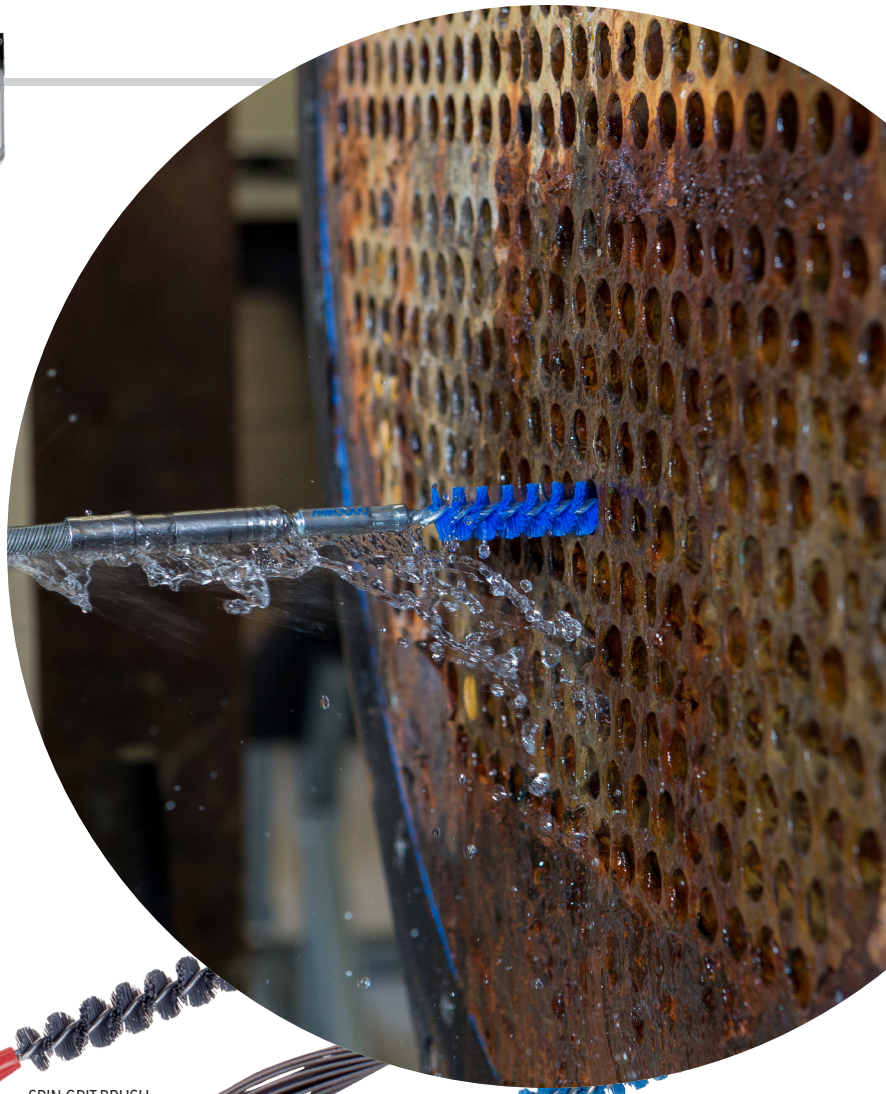

RAM-DOLLY-C

RAM4-SVC-KIT

SPIN GRIT BRUSH

BUFFING TOOL

BLUE NYLON BRUSH

CONTRACTOR DOLLY:
This durable, ergonomic dolly with storage rack, accessory bin and pneumatic tires is ideal for off-site job locations.

RAM-DOLLY-C: Heavy-Duty Contractor Dolly (upgrade)* **$395.00**

***Note:** When not ordered as an upgrade with a machine the RAM-DOLLY-C is $595.00.

RAM-4 SERVICE KIT:
Bring your RAM-4 back into shape with a rebuild kit including all the major wear items. This includes illustrated instructions, upper and lower bearings, manifold snap ring, seal, shaft/driver, screen washer and even the screws to put everything back together.

RAM4-SVC-KIT: RAM-4 Service Kit includes 805 O-ring, 824 Seal, 825 Bearing, 826 Snap Ring, 833 Lower Bearing, 873 Shaft/Driver, 803 Screen Washer and HWST-1037-P Cover Screws (package of six) **$184.00**

CHILLER TUBE CLEANING SYSTEM:
This is our most commonly used package for cleaning Trane, Carrier, York, McQuay and other units. It has everything you need for a cleaner, more efficient chiller performance.

R4R-25Q: Chiller Tube Cleaning System with quick connect fittings: ..... **Call for Price**

- 1 – RAM-4-60-R Ream-A-Matic Tube cleaner with contractor dolly
- 2 – GTC-703Q-25 Flexible Shafts
- 1 – 9401 Chiller Bib Bag
- 1 – 9402 Chiller Bib Frame
- 50 – GTC-211Q Blue Nylon Brushes (specify size)
- 15 – SGBQ Spin-Grit Brushes (specify size)
- 1 – REP-703Q-KIT Repair Kit for GTC-703Q Flexible Shafts

R4R-25: Same as R4R-25Q, except with threaded fitting **Call for Price**

GOODWAY®
INNOVATIVE MAINTENANCE SOLUTIONS

Call: 1-800-333-7467
Visit: www.goodway.com
Goodway Technologies Corporation
420 West Avenue, Stamford, CT 06902-6384 U.S.A.
Phone: 203-359-4708 • Fax: 203-359-9601 • goodway@goodway.com